

KICKASS



**LED TORCH FLASHLIGHT WITH
CHARGING DOCK & WALL MOUNT**

OWNER'S MANUAL

KATORCHFL-WCD

VER 1.3

SAFETY NOTES

- The flashlight is not a toy and should not be used by children.
- Do not use the flashlight near flammable materials, open flames, or in areas with explosive gases or high humidity.
- Only use the flashlight with the provided accessories.
- Do not shine the light directly into the eyes of people or pets, especially in high-brightness modes.
- Inspect the power cable regularly and never use damaged or non-original cables or plugs.
- Always turn off the flashlight when it is not in use.
- Fully charge the flashlight before first use to ensure optimal battery life.
- Charge and use the flashlight in a well-ventilated area and avoid extreme temperatures.
- Do not use the flashlight if it appears damaged; contact KickAss customer support.
- The flashlight surface may become hot during operation – please avoid extended direct contact.
- Do not immerse the flashlight or charging dock in water.
- Mount the charging dock on a stable, flat surface.
- If the flashlight is not used regularly, fully charge it at least once every three months to help maintain battery health and extend its lifespan.
- Flashing light may trigger seizures in individuals with photosensitive epilepsy. Use with caution around those at risk.

TABLE OF CONTENTS

SAFETY NOTES	2
PRODUCT SPECIFICATIONS	4
INCLUDED COMPONENTS	4
PRODUCT FEATURES	5
PRODUCT OVERVIEW	6
PRODUCT INSTALLATION	7
CHARGING THE FLASHLIGHT	8
OPERATING THE FLASHLIGHT	9
USING THE FLASHLIGHT	9
ADJUSTING THE LIGHT BEAM FOCUS	9
BATTERY STATUS INDICATOR	10
BELT/POCKET CLIP	10
MAGNETIC BASE	10
TROUBLESHOOTING	11
CLEANING INSTRUCTIONS	12
WARRANTY & SUPPORT INFORMATION	12

PRODUCT SPECIFICATIONS

PRODUCT DIMENSIONS	63 x 73 x 150 mm (LWH)
PRODUCT WEIGHT	0.2 kg
BATTERY CAPACITY	2600mAh 4.1V
USB-C INPUT	4.2V/1A (4.2W)
STANDBY CURRENT	0.364μA
APPROXIMATE RUN TIME	Low mode: 24 hours 55 minutes High mode: 2 hours 50 minutes
APPROXIMATE CHARGING TIME	5 hours
UNDER-VOLTAGE PROTECTION	2.68V

INCLUDED COMPONENTS



FLASHLIGHT



CHARGING DOCK



MOUNTING BRACKET



METAL CLIP



2 X MOUNTING SCREWS
2 X PLASTIC ANCHORS



USB-C to USB-A CHARGING CABLE

PRODUCT FEATURES

- The flashlight charges easily by placing it onto the docking station, which connects to a power source via a USB-C to USB-A cable.
- A strong magnetic base on the dock secures the flashlight in place for safe and hassle-free charging.
- An adjustable focus function lets you adjust the beam from a wide flood light to a focused spotlight depending on your needs.
- The built-in 4.1V 2600mAh rechargeable battery eliminates the need for disposable batteries and helps reduce waste.
- Three brightness levels (60 lumens, 250 lumens, and 600 lumens) provide flexible lighting for differing environments.
- The light beam reaches up to 250 meters, offering reliable long-distance visibility for outdoor or work-related purposes.
- An Osram P8 LED enhances brightness, energy efficiency, and overall durability.
- A durable metal clip allows secure attachment to belts, pockets, or gear for hands-free use.
- The compact and lightweight design fits easily into toolkits, glove compartments, or small storage spaces.
- An included wall-mountable plate keeps the flashlight stored in a fixed and accessible location.
- The flashlight attaches firmly to the wall plate, reducing the risk of drops, loss, or misplacement.
- Rugged construction makes it a dependable tool for professionals and everyday users.

PRODUCT OVERVIEW



PRODUCT INSTALLATION



Select a flat, stable surface for mounting. Make sure the area is free from flammable materials, explosive gases, electrical wiring, open flames, water, and excessive humidity.




Hold the mounting bracket in your desired position, keeping it level. Use a ruler or spirit level to ensure the holes are horizontally aligned.



Mark the two screw hole positions with a pencil or marker.



Drill holes at the marked points using an 8mm drill bit, then insert the provided plastic anchors firmly into the holes.



Align the bracket and fasten it to the wall using the two supplied screws, ensuring it is kept level.



To attach the charging dock, align the dock's central slot with the latch on the mount, and then twist clockwise to secure into place.

Note: Before inserting the flashlight, make sure the dock is securely attached and stable.

CHARGING THE FLASHLIGHT

- Using the included charging cable, connect the USB-C end to the dock's charging port and the USB-A end to a reliable power source such as a power bank, wall adapter, or car charger.
- The battery indicator will light up green to show that the dock is ready for charging.



Note: Before placing the flashlight into the charging dock, ensure that both the flashlight and dock are clean and free from any debris or obstructions that may interfere with charging.

- Place the flashlight into the charging dock; the magnetic feature will automatically secure it in place.
- Check the battery indicator light while the torch is in the dock to monitor the charging status:
 - Red – charging in progress
 - Green – flashlight is fully charged



- Once fully charged, remove the flashlight from the dock and unplug the cable from either the dock or the power source.

OPERATING THE FLASHLIGHT

Note: Please fully charge the flashlight before first use.

USING THE FLASHLIGHT




- Pressing the POWER/LIGHT MODE button will cycle through the following:

Power OFF ▶ ON/High Brightness ▶ Medium Brightness ▶ Low Brightness ▶ Power Off

ADJUSTING THE LIGHT BEAM FOCUS


- To narrow the beam and focus on a central spot, hold the flashlight body and twist the head clockwise.
- To widen the beam for broader coverage, hold the flashlight body and twist the head counterclockwise.

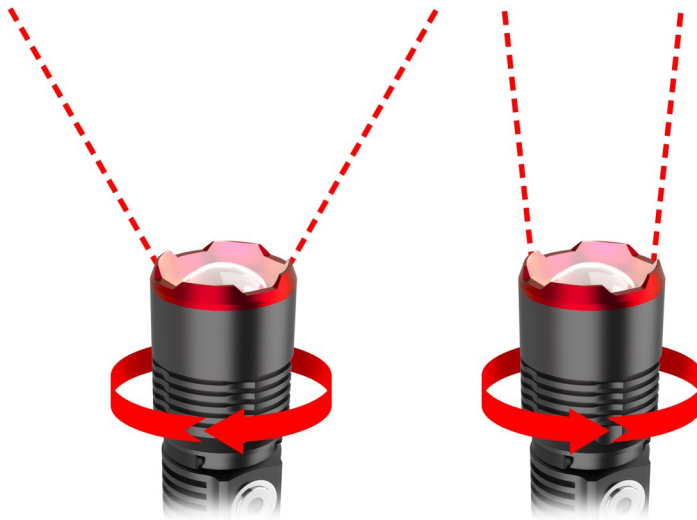

BATTERY STATUS INDICATOR

When the light is turned on:

- Green Light – Battery is sufficiently charged
- Red Light – Low battery; recharge is required

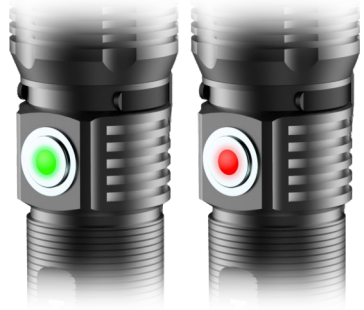

BELT/POCKET CLIP

Sturdy clip allows for easy attachment to belts, pockets, or bags for hands-free carrying.



MAGNETIC BASE

Built-in strong magnet at the bottom allows attachment to metal surfaces for hands-free use.



TROUBLESHOOTING



<p>The flashlight won't turn on.</p>	<ul style="list-style-type: none">• Press the POWER button and check if the button LED lights up green. If the LED lights up red, the unit's battery is low and needs charging. If the LED does not light, the unit is flat. Please charge the flashlight.
<p>The flashlight won't charge.</p>	<ul style="list-style-type: none">• Check if the charging indicator lights up green when the dock is plugged in (without the flashlight present). If not, there may be an issue with a connection, charging cable, power source, or the dock.• Ensure the charging cable is securely connected to both the dock and a working power source.• Check the condition of the charging cable for any visible damage such as frayed wires or loose fittings, as this may prevent proper charging. If any damage is found, try using a different cable.• Check the magnetic base of the flashlight and the charging dock for any debris or obstructions that could interfere with charging. Clean both surfaces if needed.
<p>The charging dock shows a green light, but the flashlight battery is still flat or low.</p>	<ul style="list-style-type: none">• Please note that the charging dock lights up green when connected to a power source without the flashlight present. This may be mistaken for full charge.• Ensure both the magnetic base of the flashlight and the charging dock are clean and free of debris to prevent interference. Clean both surfaces if necessary.• When placing the flashlight on the charging dock, check if the indicator light turns red. This confirms that the unit has made proper contact and is charging.

CLEANING INSTRUCTIONS

- Do not use sharp or hard objects to clean the flashlight, as they may cause scratches or damage.
- Always turn off the flashlight and disconnect it from any power source before cleaning.
- Avoid cleaning the flashlight while it is charging or in a humid environment to prevent electrical hazards.
- Take care not to scratch the lens. Use a soft, non-abrasive cloth for cleaning.
- Do not use abrasive cleaners, solvents, or corrosive chemicals, as these can damage the surface or internal components.
- Wipe the flashlight with a soft, damp cloth. Do not immerse in water or use running water to clean. Avoid harsh chemicals or abrasive materials.

WARRANTY & SUPPORT INFORMATION

Need help? For product support or to make a warranty claim, reach out to the KickAss Customer Service team on: warranty@kickassproducts.com.au

Alternatively, visit our Customer Support Portal at:
<https://supportportal.kickassproducts.com.au/>

KICKASS

**KickAss is a registered trademark of
KickAss Products Pty Ltd**

**Designed & imported by
KickAss Products Pty Ltd
39 Iris Place, Acacia Ridge, QLD 4110
Australia**

Made in China

